


## STx High Performances Triggered Microchip Series

### Key features

- ▶ Ultra-short pulses down to 350ps
- ▶ 1064nm, 532nm, 355nm and 266nm
- ▶ Single-shot to 4kHz
- ▶ Multi-kW peak power
- ▶ Excellent beam quality
- ▶ Efficient, air-cooled
- ▶ Sealed package, extremely long life

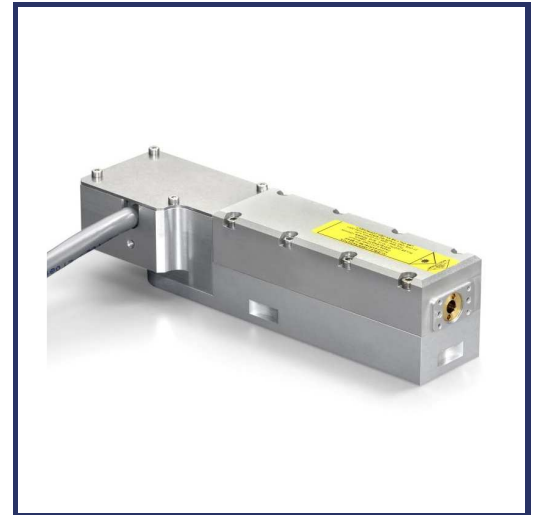

**For generating high peak power pulses of a few hundred picoseconds, microchip lasers are economical, compact, and reliable. Visible and UV wavelength are generated from the harmonic conversion of an IR passively Q-switched Nd:YAG microchip engine, within a sealed package ensuring incredibly long lifetime even in harsh industrial environment.**

**The triggered series offer the highest peak power and shortest pulses of the entire Microchip family, and span the full wavelength spectrum down to 266nm. With these devices, the user is able to trigger pulse emission on demand from single-shot to 4kHz.**

### Applications

- ▶ Instrumentation
  - Ranging
  - Differential absorption LIDAR
  - Super-continuum generation
  - Distributed temperature sensing
  - Raman spectroscopy
- ▶ Biophotonics
  - Micro-dissection of cells
  - Brain nanosurgery
  - Protein cross-linking

For your application, find your pulsed laser solution

**teem** photonics™

**Technical specifications:**

	STP-07E-1x0	STG-03E-1x0	STV-01E-1x0	STV-02E-1x0 <sup>(9)</sup>	STU-01E-1x0
<b>Wavelength</b>	1064nm	532nm	355nm	355nm	266nm
<b>Maximum Repetition Rate</b> RR <sub>max</sub> <sup>(1)</sup>	4kHz	4kHz	4kHz	4kHz	4kHz
<b>Constant Pulse width (FWHM)</b> <sup>(2)</sup>	<0.7ns	<0.5ns	<0.4ns	<0.6ns	<0.4ns
<b>Output energy</b>	>7μJ	>3μJ	>1μJ	>2μJ	>1μJ
<b>Peak Power</b>	>10kW	>6kW	>2.5kW	>4kW	>2kW
<b>PCD</b> <sup>(3)</sup>	<70μs	<70μs	<100μs	<100μs	<100μs
<b>PCD jitter</b>	<±1.5μs	<±1.5μs	<±1.5μs	<±1.5μs	<±1.5μs
<b>Short term (1min) power stability</b> <sup>(4)</sup>	<±1%	<±1%	<±2%	<±2%	<±2%
<b>Long term (6 hrs) power stability</b> <sup>(4)</sup>	<±3%	<±3%	<±5%	<±5%	<±5%
<b>Beam profile</b>	Gaussian TEM00	Gaussian TEM00	Gaussian TEM00	Gaussian TEM00	See note (8)
<b>Full angle divergence</b> Horizontal@1/e <sup>2</sup> Vertical@1/e <sup>2</sup>	13±5mrad 13±5mrad	10±2mrad 9±2mrad	11±2mrad 7±2mrad	11±2mrad 7±2mrad	11.5±2mrad 0.65±0.25mrad
<b>M<sup>2</sup></b> <sup>(5)</sup>	<1.3	<1.3	<1.3	<1.3	<1.4
<b>Beam ellipticity</b> <sup>(6)</sup>	<1.3	<1.3	<1.3	<1.3	N/A
<b>Main Lobe Gaussian Fit</b> <sup>(7)</sup>	N/A	N/A	N/A	N/A	>85%
<b>Polarization</b>	Linear PER>20dB	Linear PER>20dB	Linear PER>20dB	Linear PER>20dB	Linear PER>20dB
<b>Package dimensions</b>	144x42x36mm	144x42x36mm	186x60x36mm	186x60x36mm	210x60x36mm
<b>Package weight</b>	300g	300g	500g	500g	500g
<b>Options (table p3)</b>	0,1,2,3,4,F,M	0,1,2,3,4	0,1,2,3,4,C	0,1,2,3,4,C	0,1,2,3,4,C
<b>Options included</b>	S	S	S	S	S

**Notes**

(1)	See options p3
(2)	Measured with 1Ghz photodiode and 1GHz/10GS/s oscilloscope.
(3)	PCD = Pulse Creation Delay, the delay between the trigger command and the effective pulse firing
(4)	For temperature variation < ± 3°C and < 3°C/hour, stability is measured with calorimeter – detector band [DC, 2Hz]
(5)	Mean average value $M = \sqrt{(XY)}$ , X and Y being respectively the major and minor axis of the ellipse
(6)	Beam ellipticity is calculated as the ratio of the main axis far field divergence
(7)	Measurement performed in the far field with a Wincam <sup>TD</sup> -U series camera
(8)	Beam exhibits different profile in horizontal (Gaussian) and vertical ((sin x /x) <sup>2</sup> in far-field) plans
(9)	Contact factory for availability

All information contained herein is believed to be accurate and is subject to change without notice. Teem Photonics may not be held liable for its use. Teem Photonics, its subsidiaries and affiliates, reserve the right to modify or withdraw, at any time and without any notice, specifications, product design, product component. Some options may not be available for all products. Please contact Teem Photonics for details. November 13

**STx series - Page 2 of 6**  
**www.teemphotonics.com**

For your application, find your pulsed laser solution

**teem** photonics™

**Complementary information & options:**

**Environment Parameters**

<b>Operating Temperature Range</b>	0-50°C for STP and STG 15-35°C for STV and STU
<b>Maximum Laser Head Baseplate Temperature</b>	50°C for STP and STG 40°C for STV and STU
<b>Maximum Power Consumption</b>	<40W
<b>Laser Head Thermal Dissipation</b>	<15W
<b>Storage Temperature</b>	0-50°C
<b>Shock of 11ms according to IEC 68-2-27, non operating</b>	25g
<b>Vibration 5Hz to 500Hz sinusoidal according to IEC 68-2-6</b>	2g

**Certification**

<b>Laser classification according to IEC 60825-1:2007</b>	3B Except STU-01E : 4
<b>CDRH</b>	Yes, if used with a -DP1 controller
<b>ROHs</b>	Yes

**Options**

<b>Fixed Repetition Rate = RR<sub>max</sub></b>	-10x version
<b>Fixed Repetition Rate ≠ RR<sub>max</sub></b>	-11x version ; RR to be chosen over 10Hz-RR <sub>max</sub>
<b>External Variable Repetition Rate</b>	-12x version ; single shot to RR <sub>max</sub> , 1 optimized RR value
<b>External Variable Multi-Repetition Rate</b>	-13x version ; single shot to RR <sub>max</sub> , 3 optimized RR values
<b>External Continuous Variable Repetition Rate</b>	-14x version ; optimized over [single shot; 2kHz] range
<b>Multimode fibering (M)</b>	Contact factory for availability
<b>Single mode fibering (F)</b>	Contact factory for availability
<b>Collimation (C)</b>	With collimated beam
<b>Synchronization output (S)</b>	TTL compatible output signal for synchronization/monitoring


**Available Controller Types**

<b>Model</b>	<b>Type</b>	<b>Input Power</b>	<b>CDRH</b>
MLC-03A-DP1	Desktop	100-240 V AC	Yes
MLC-03A-MP1	Module	12 V DC	No
MLC-03A-BP1	Board	12 V DC	No

For your application, find your pulsed laser solution

teem photonics™

**CDRH Laser Head Mechanical Drawings : STP-07E-1x0, STG-03E-1x0**

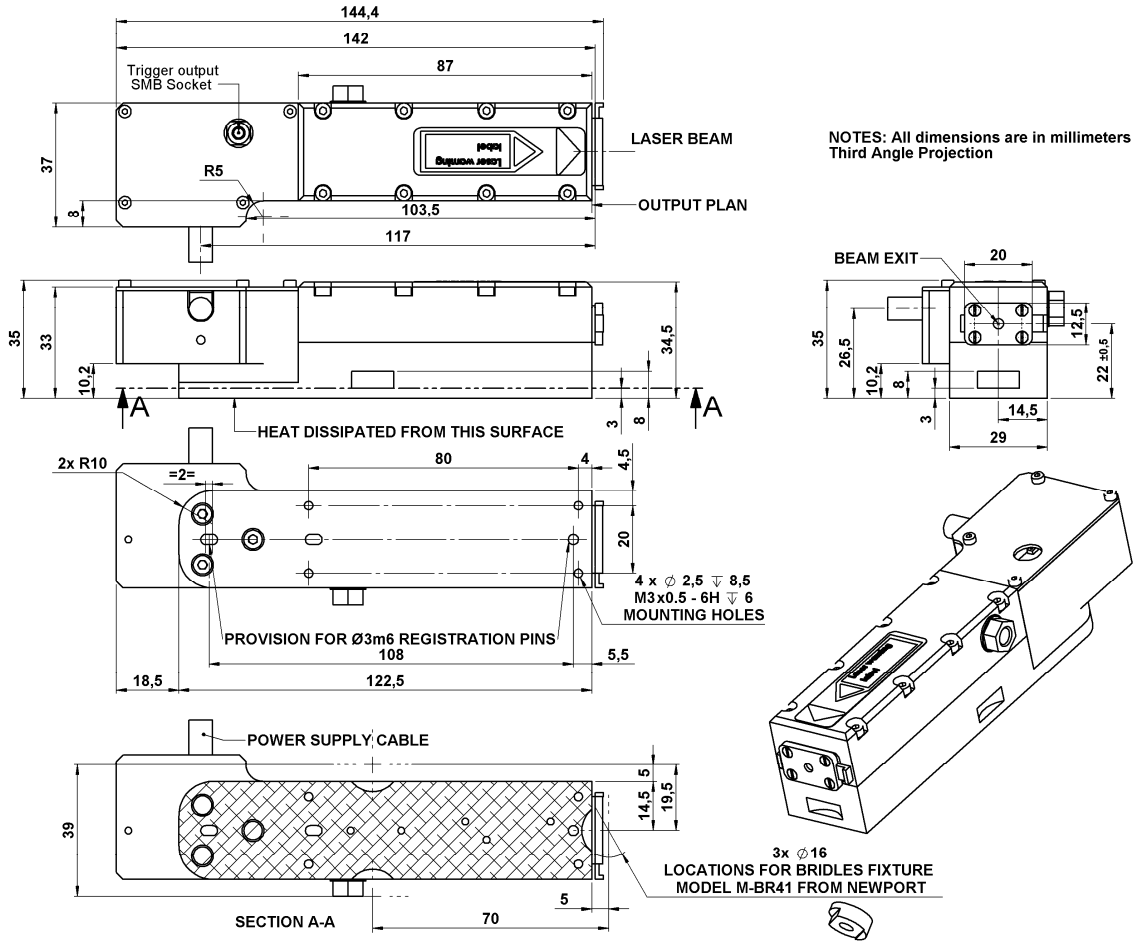


NOTES: All dimensions are in millimeters  
Third Angle Projection

For your application, find your pulsed laser solution

teem photonics™

**CDRH Laser Head Mechanical Drawings : STV-01E-1x0, STV-02E-1x0**

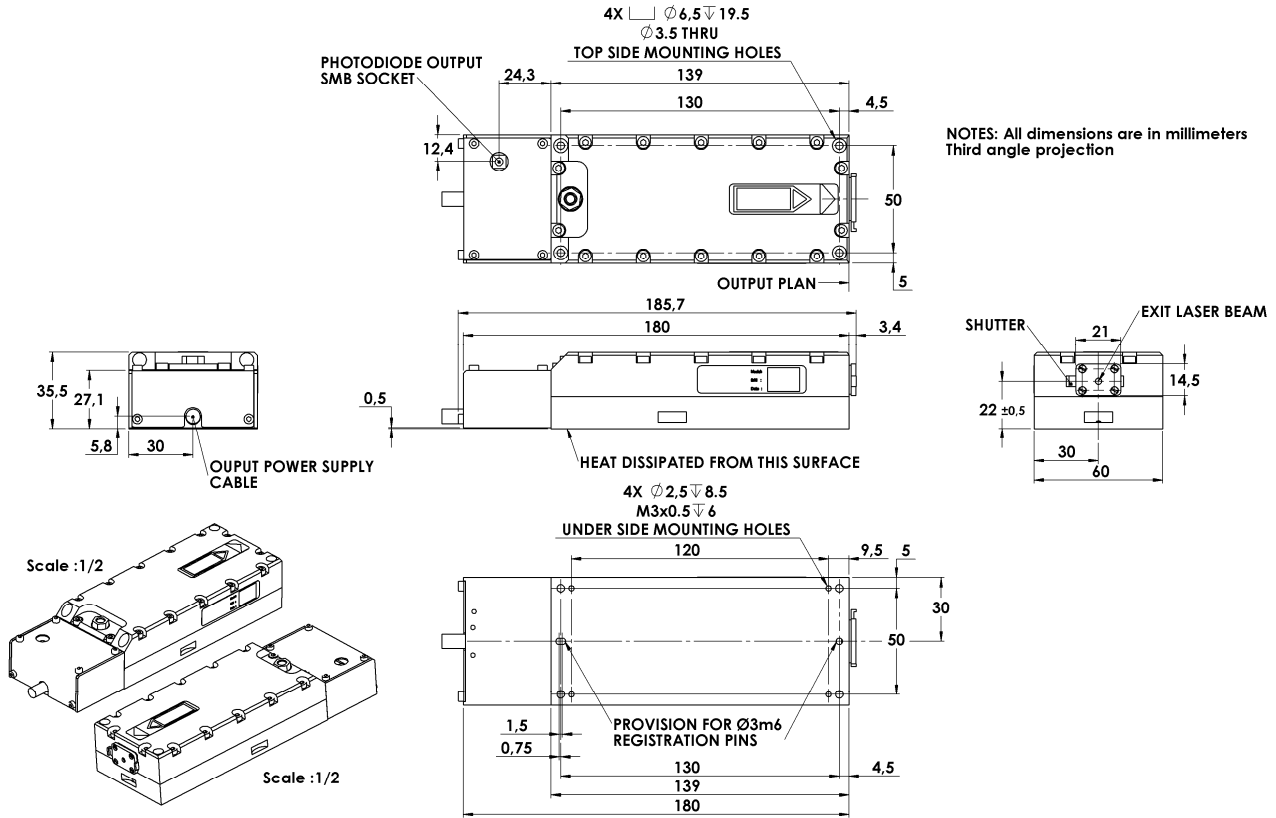

For your application, find your pulsed laser solution

**teem** photonics™

**CDRH Laser Head Mechanical Drawings : STU-01E-1x0**

